

# Focus on Smart-Life Textile Printing



May, 2018.  
Most Economic High-Speed DTG solution



## Rival Direct-to-Garment Digital Printer

- Digital printing, offers solutions for customized garment
- Max. resolution up to 600 x 1200 dpi
- One-button color management, can process white & color at the same time
- One-stop pressing unit, connects printing steps seamlessly
- Double-plate continuous production, greatly improves print productivity
- Better eco-friendly application, little environmental pollution
- Applicable to offices & small workshops



Intelligent



Convenient




Personalized



Environmental protection

## Specifications

<b>Productivity</b>		<ul style="list-style-type: none"> <li>• 60-120 pcs/h</li> </ul>
<b>Printheads</b>	Printhead	<ul style="list-style-type: none"> <li>• Gray-scale Industrial Printhead</li> </ul>
<b>Printing</b>	Resolution	<ul style="list-style-type: none"> <li>• 600 x 1200 dpi</li> <li>• 900 x 1200 dpi</li> </ul>
	Print Height Range	<ul style="list-style-type: none"> <li>• 3-15 mm</li> </ul>
	Image Area	<ul style="list-style-type: none"> <li>• 40 x 50 cm</li> </ul>
	Material	<ul style="list-style-type: none"> <li>• Pure cotton or mixed cotton fabric</li> </ul>
<b>Machine</b>	Overall Size (L x W x H)	<ul style="list-style-type: none"> <li>• 220 x 320 x 195 cm</li> </ul>
	Pallet Size (W x L)	<ul style="list-style-type: none"> <li>• 40 x 54 cm</li> </ul>
	Station	<ul style="list-style-type: none"> <li>• 2</li> </ul>
	Weight	<ul style="list-style-type: none"> <li>• 1400 kg</li> </ul>
<b>Ink</b>	Ink Type	<ul style="list-style-type: none"> <li>• Eco-friendly pigment ink, Water-based</li> </ul>
	Colors	<ul style="list-style-type: none"> <li>• CMYK + (Red+Green) + White</li> </ul>
<b>Software</b>	RIP Software	<ul style="list-style-type: none"> <li>• Rival dedicated RIP software</li> </ul>
	Operating Software	<ul style="list-style-type: none"> <li>• Windows</li> </ul>
<b>Operation</b>	Ink Supply	<ul style="list-style-type: none"> <li>• Automatic ink supply, Ink circulatory system</li> </ul>
	Cleaning	<ul style="list-style-type: none"> <li>• Automatic cleaning system</li> </ul>
	Moisturizing	<ul style="list-style-type: none"> <li>• Non-contact moisturizing</li> </ul>
<b>Operating Environment</b>	Temperature	<ul style="list-style-type: none"> <li>• 25°C ± 2°C</li> </ul>
	Humidity	<ul style="list-style-type: none"> <li>• 60%-70%</li> </ul>
	Power Supply	<ul style="list-style-type: none"> <li>• AC 220 V ± 10%, 1 ph, 41 A, 50/60 Hz, 9 kW</li> </ul>
	Air Supply	<ul style="list-style-type: none"> <li>• 0.6 MPa</li> </ul>

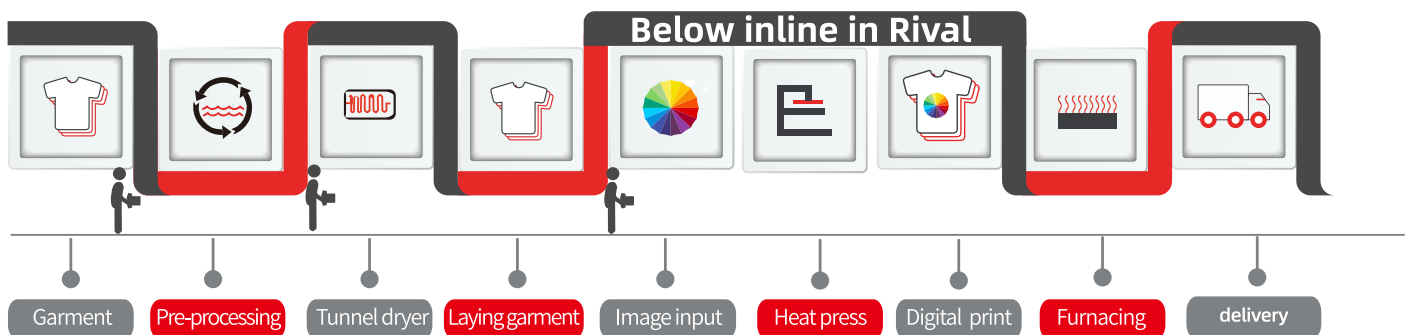

© The above information is only for your reference. SHENZHEN CNTOP DIGITAL EQUIPMENT CO.,LTD reserves the right of final interpretation. If changes are made without prior notice, the final information will be subject to the contract.



**Shenzhen CNTOP Digital Equipment Co.,Ltd**

Add: The Third Factory, NO.322 Yuanhu Road, Longgang District Shenzhen China.  
 Fax: +86 0755-23217841  
 E-mail: info-cntop@hanglorygroup.com

