

Personalized DTG Expert



Wings Compact DTG Expert

Nov, 2017.
Best Processing Solution
for DTG Printing



- Provides intelligent order-to-delivery industrial digital solution for customized garment printing
- Equipped with 32 gray-scale industrial printheads, resolution up to 600 x 1800 dpi
- Entire process requires only one person to operate, lowers labor & time cost
- Max. productivity up to 240 pieces per hour
- Intelligent order processing function, achieves flash production in real time
- Integrates pre-treatment workflow, capable of solving all printing processes by one click
- Open garment printing platform, meets the diversified demands of customers



Intelligent



Fast



Productive




Personalized

Wings Compact

Specifications

Productivity		<ul style="list-style-type: none">• 240 pcs/h
Print Head	Printhead	<ul style="list-style-type: none">• Gray-scale Industrial Printhead
Printing	Resolution	<ul style="list-style-type: none">• 600 x 1800 dpi• 900 x 1200 dpi
	Print Height Range	<ul style="list-style-type: none">• 1-15 mm
	Image Area	<ul style="list-style-type: none">• 420 x 550 mm
	Material	<ul style="list-style-type: none">• Pure cotton or mixed cotton fabric
Machine	Pallet size	<ul style="list-style-type: none">• 450 mm x 570 mm
	Machine size	<ul style="list-style-type: none">• 6029 mm x 4089 mm x 1836 mm (L x W x H)
Ink	Ink type	<ul style="list-style-type: none">• Environmental pigment ink
	Colors	<ul style="list-style-type: none">• CMYK + White
Software	RIP Software	<ul style="list-style-type: none">• Wings dedicated RIP software
	Operating Software	<ul style="list-style-type: none">• Windows
Operation	Transport	<ul style="list-style-type: none">• Automatic transport platform
	Ink supply	<ul style="list-style-type: none">• Automatic ink supply
	Cleaning	<ul style="list-style-type: none">• Automatic cleaning system
	Moisturizing	<ul style="list-style-type: none">• Non-contact moisturizing
Operating Environment	Temperature	<ul style="list-style-type: none">• 20°C-25°C
	Humidity	<ul style="list-style-type: none">• 60%-70%
	Power supply	<ul style="list-style-type: none">• AC 220V±10%, 1ph, 46A, 50/60Hz, 10kW
	Air supply	<ul style="list-style-type: none">• 0.6MPa

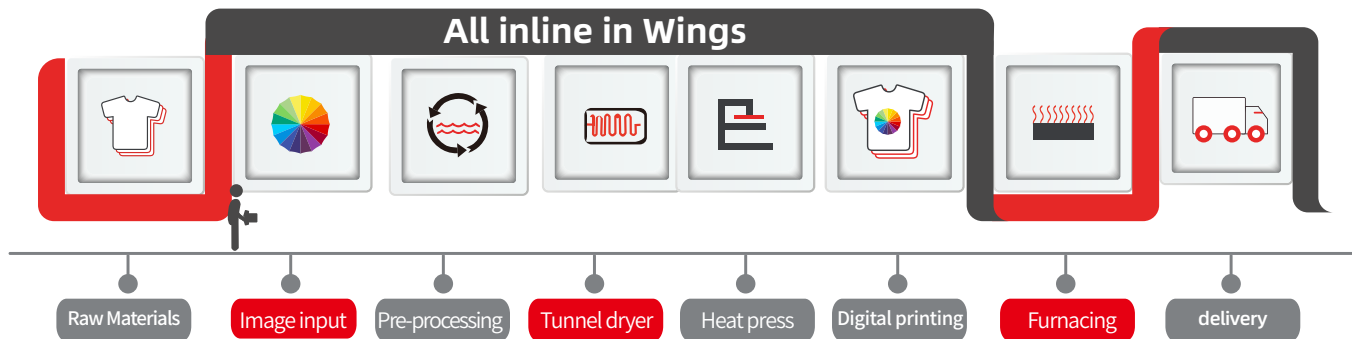

One piece every 10-15 seconds

© The above information is only for your reference. SHENZHEN CNTOP DIGITAL EQUIPMENT CO.,LTD reserves the right of final interpretation. If changes are made without prior notice, the final information will be subject to the contract.



Shenzhen CNTOP Digital Equipment Co.,Ltd

Add: The Third Factory, NO.322 Yuanhu Road, Longgang District Shenzhen China.
Fax: +86 0755-23217841
E-mail: info-cntop@hanglorygroup.com

